


TOP-LINE ASSEMBLY INSTRUCTIONS


1. What is TOP-LINE?

TOP-LINE is a transition profile developed by Döllken, that consists of a base section (1) with self adhesive tape (2) and a cover section (3). It consists of high quality, chlorine free Thermoplastic with a real, heat resistant aluminium surface. This profile is supplemented by functional accessories like end caps and corners.



2. Where is TOP-LINE used?

TOP-LINE can be used in all areas where there are surfaces standing at right angles to each other in order to cover and seal unsightly gaps. At the same time it helps even out any irregularities. By its well constructed concept and the timeless design of the profile it can be used in a multitude of ways. As a wall seal for kitchens TOP-LINE is particularly well suited.

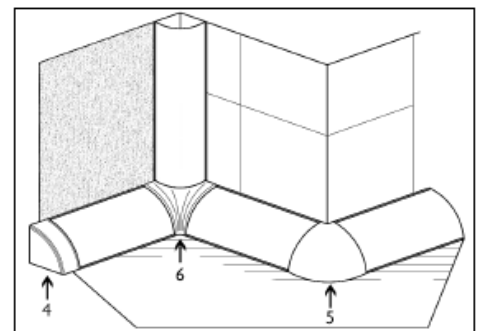

3. How is TOP-LINE used?

- The profile, which is already clipped together, has to be cut to length (consider measurement reductions for inner edges $90^\circ = 14 \text{ mm}$, inner edge $135^\circ = 7 \text{ mm}$)
- Separate cover section from base section
- With adhesive side in direction of the wall lay the base section on the work surface (The surface where the self adhesive tape will go has to be firm, dry and grease free)
- Remove ca. 50 cm of the protective foil and press the base section against the back wall
- Remove the protective foil entirely bit by bit but pay attention so that no more is removed than can be successfully affixed at any time
- Attach the equivalent accessory to the cover section and clip that onto the base section

Directions:

Please be gentle in the assembling process. Once the self adhesive tape is attached it cannot be removed without partially or totally destroying it. If in a particular case attachment is only possible by drilling it is necessary to pre-drill the profile in order to avoid breaking the material.

4. What accessories are available for TOP-LINE?

The accessories can be used in many ways. To finish off the ends there are end caps (4) for use on both the left and right sides. The external corner (5) can be used vertical and horizontally. The 90° internal corner (6) can also be installed vertically and horizontally. With any horizontal use it is possible to use the top of the internal corner of TOP-LINE vertically, however here it is necessary to make a clean cut. Of course a 135° internal corner is part of our assortment as well.

SURTECO
GmbH

.....
we create.
we innovate.

SURTECO GmbH
Am Brühl 6
86647 Buttenwiesen
Germany
T: +49 8274 51-0
F: +49 8274 51-512
info@surteco.com
www.surteco.com